



DracoDrum TM

Solum 16 & 25 User Guide and Installation Manual

Table of Contents


Introduction	3
Product Information	4
Getting to know your DracoDrum Solum	5
Installation	7
Attaining Correct Water Level	7
Float Switch.....	7
Control Unit.....	7
Using Your DracoDrum Solum	8
Starting your Drum for the First Time.....	8
Operation	8
Making Adjustments	9
Rotations per wash	9
Adjusting the height of the sensor.....	9
LED Lights on the Control Box.....	11
Day to Day usage.....	11
Maintenance	12
Cleaning the Screen	12
Waste Tray	12
General.....	12
Tips.....	12
Breakages.....	14
DracoDrum Guarantee.....	15

Introduction

Congratulations on the purchase of your DracoDrum Solum RDF

The drum is designed for simplicity of installation and use. The most challenging requirement for you, is to decide where you wish your control box to be placed.

On the following pages we will show you the different components of your drum, how to install it and how to perform fault finding if something should stop working as it should.

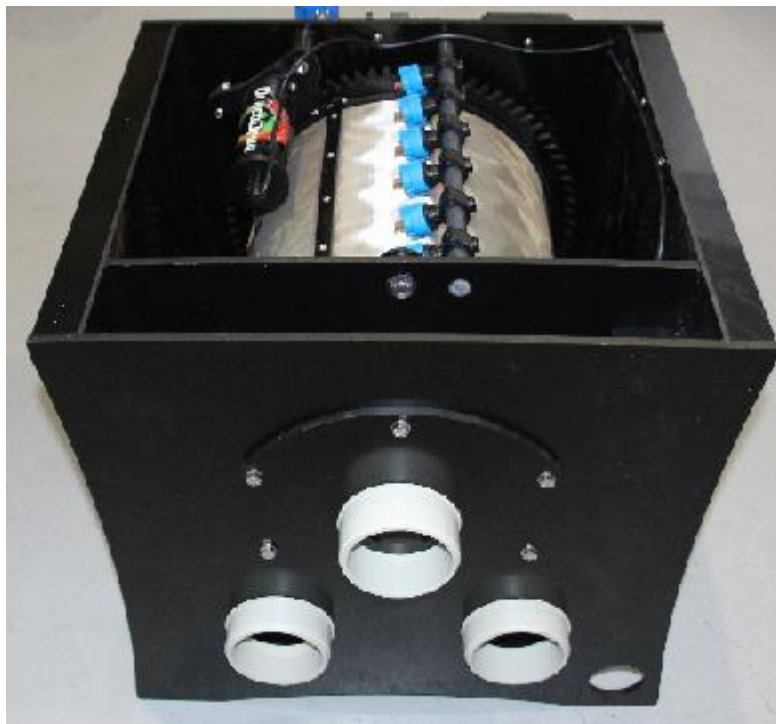

Product Information

The following components are all IP65 rated

- Control box
- Junction box
- Umbilical plug and socket

Incoming Power Rating

100 – 230V, 50-60hz

Stepped down to 12V DC via the control box

Motor

12V DC, 3 step planetary gear, direct drive, output 18RPM

Valve / Wash pump

12V DC

Dimensions

	Solum 16	Solum 25
Width –	610mm	610mm
Overall height –	581mm	581mm
Depth (front to back body only) –	560 mm	670mm
Height above water level (gravity fed) –	180mm	180mm
Height above water level (pump fed) –	240mm	240mm

Mesh Screen

58 Micron Stainless Steel

Maximum flow Rate

3,700 GPH /
16000 LPH

5,500 GPH /
25,000 LPH

Minimum Tap Water Pressure

2.0 BAR

3.0 BAR

Getting to know your DracoDrum Solum




A – Inlet

B – Waste Outlet

C – Optional return pipe routing hole

D – Waste Inspection Hatch

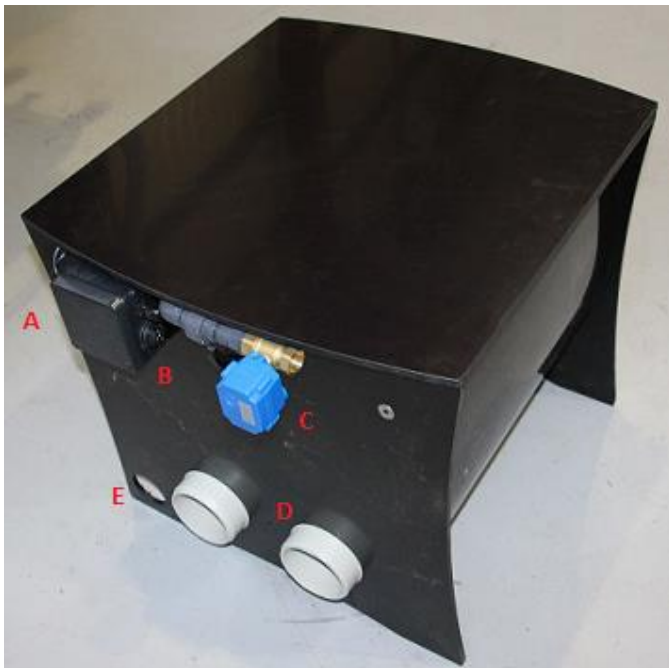

A– Junction Box

B – Umbilical socket

C – Water valve

D – Outlet pipes

E – Optional return pipe routing hole



- A – Drive motor on swing mount
- B – Spray bar
- C – Water level sensor (G= gravity P= Pump fed)
- D – Waste tray access
- E – Junction box
- F – Junction box cable access
- G – Bypass plates
- H - Drum and 58 micron filter screen
- I – Water valve

Installation

Make sure that the Solum is placed onto a flat surface 16cm higher (gravity) or 19cm higher (pump fed) than your biological filter.

If you do not need to use both the inlet or outlets make sure you seal the unused inlet/outlet securely to stop any leakage. The pipes are standard 110mm

Attaining Correct Water Level

When fitted,

Gravity fed mode, running water level should be about halfway or just below middle of the waste tray.

Pump fed mode, front mounted sensor should be about 35 - 40mm above water level.

Connecting the Water

Water valve operated spray bars, connect your incoming water supply to the valve. In the UK this should be via a standard 15mm pipe. For international, an adaptor will be required and the valve body uses a standard 3/4" BSP female thread.

Optional Pressure Pump the above can be ignored as the water is taken from the "clean" side of the drum.



Float Switch

Gravity fed, adjust the internal (Clean side) float switch so that when fully floating, the sensor is just below running water level (see Attaining correct water level). Finger tighten the M6 bolt to secure.

Pump fed, adjust the external (dirty side) float switch so that the float switch should be 35mm above running level. (see Attaining correct water level)

Control Unit

You now need to decide where you want your control unit to be and ensure it is securely attached. The unit comes with a 4 metre cable to allow you a considerable amount of flexibility. If you do not need to use the entire 4 metre length we suggest you use a cable tie or equivalent to ensure it is kept tidily and safely out of the way rather than cutting it, just in case you should change your mind in the future.

Ensure that the red off button is pushed in and self-locked in the “off” position before you plug the unit into the power supply and before you attach the umbilical onto the Solum

Once you have secured your control unit, route the cable back to the Solum unit and plug it in. The cable socket has an alignment notch, which faces away from the drum and the plug has an external screw ring which seals the plug into its socket.



Using Your DracoDrum Solum

Starting your Drum for the First Time

Turn on controller by twisting and unlocking the stop button. You should see a green light and a red zero. The drum is now ready to go.

Operation

When running, the drum should show a green light to confirm power is on. Initially you will see a red zero to the right of the unit. This will change as it displays the minutes between the last 2 washes. When triggered, the red sensor led will flash. This flashing will only occur whilst the sensor is actually triggering or whilst you are pressing the green button in. Once triggered this initiates a wash "cycle" and 2 blue leds will light. One for the wash pump and one for the drive motor.

A wash cycle is approximately 30 seconds. Once the 30 seconds is up, the blue leds will extinguish and the drum will stop. If the red led continues to flash, the drum will continue to wash until the red led stops flashing. If this situation lasts for more than 4 minutes, the drum will auto stop, wait for 2 minutes and then continuously monitor the sensor. Once the sensor is no longer active, it will auto restart. Whilst it is monitoring, the red led will come on solidly (failsafe mode).

You can select up to 4 wash cycles for your wash duration, so you can set the drum to wash for up to 2 minutes each time. If you need to manually trigger a wash, for example maintenance, you can press the green button on the controller to start the drum. If there is an issue with the drum, pushing the emergency stop will shut off all power within the controller as a safety feature.

Making Adjustments

Your DracoDrum allows you to make 2 adjustments to it, the length of the wash and the height of the water sensors.

Rotations per wash

You can select between 1 and 4 periods per wash. A period is *not* a full rotation but rather lasts for approximately 30 seconds. This is to ensure the same part of the screen is not constantly underwater and all parts of the drum are used equally.

To adjust the number of periods, simply turn the dial on the control box to the required number


NB: The system will over ride and continue to wash for more durations if the water level should not have reached the required minimum height that you have set with the internal water sensor after a wash.

Adjusting the height of the sensor




For gravity fed units the sensor is on the clean side of the drum. This sensor is triggered when the micron screen becomes dirty and blocked and the water level starts to drop as not enough water is able to get through.

With the system running, and the drum has just washed, you will have behind the drum what is referred to as “running water level”. This can and usually is lower than if the main circulation pump is turned off. To maximise the area of filter screen under water, the waste tray should be half submerged at this running water level. The float switch should then be set so that the floating tip of it is approximately 5mm below that.

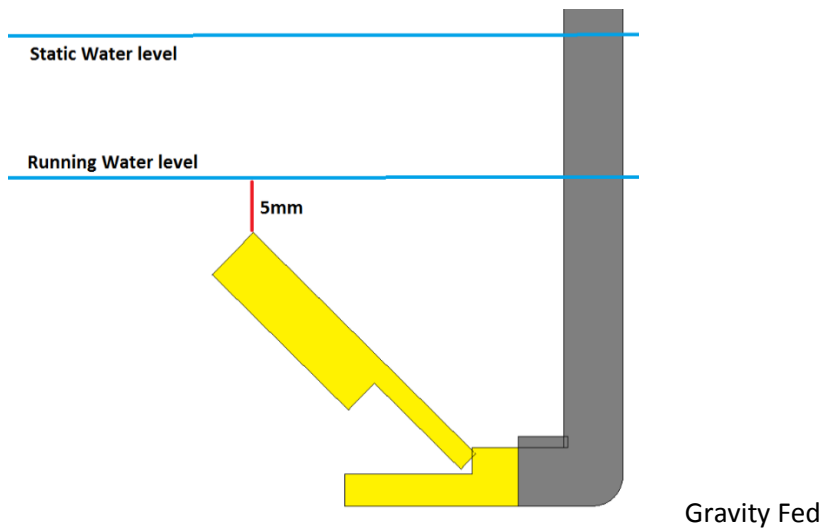

For pump fed units the sensor is on the dirty side of the drum and is triggered by a rise of water level as the screen is blocked. The water level in this case should be just below the bottom of the waste tray and the suspended float switch should be just touching the water.

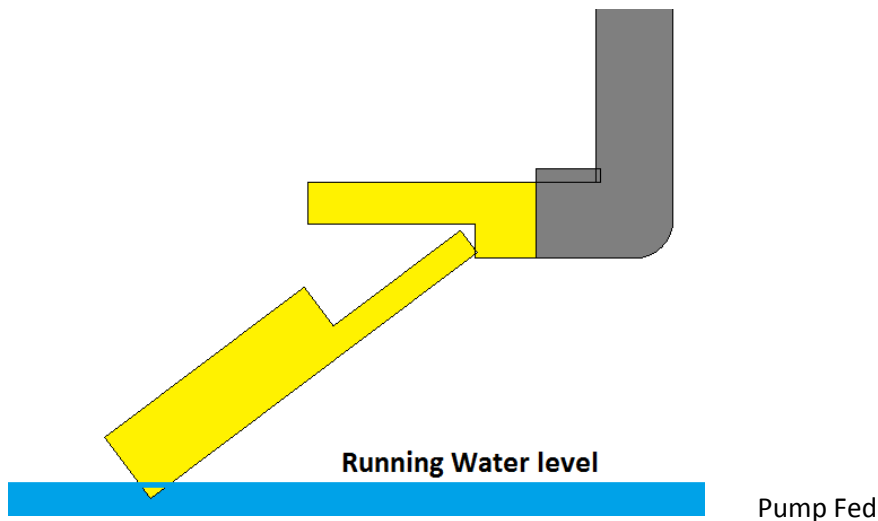

The unit will continue to wash for as many rotations as necessary until the water level reaches the required height to re-cover this sensor. E.g. if you have your unit set to only 1 rotation but a single rotational cycle is not enough to clear the debris attached to the micron screen then it will continue to rotate and clean until the sensor is re-submerged in water. If however you have the system set to four rotational cycles even if one rotation clears the screen and allows the water to return to the normal running height the unit will continue for the specified number of cycle rotations.

LED Lights on the Control Box

There are 4 LED lights on your control box which tells you what the drum is doing

Green – There is power going to the controller

Red – When lit and flashing, the sensor is active and detecting low water level to trigger a wash, or you are pressing the manual wash button.

Blue – When lit they indicate if the motor is currently active (rotating the drum) and if the wash bar is currently active

Day to Day usage

Once you are initially satisfied with the settings of your sensor and number of rotations per wash cycle, simply ensure that the green on LED is lit, the lid is down and you can walk away and leave it to do its thing.

Initially the drum will wash more frequently as it is removing all the particulates from your water down to 58 microns.

You can adjust the sensors and wash duration as many times as you want to until you get to the optimum setting for your particular filter set-up.



NB always ensure the red Off Button is activated before doing anything within the drum to ensure it will not start a cleaning cycle

All drums produce some noise whilst they are going through a wash cycle and the DracoDrum Solum is no different. However with the lid down and, in our own system, the decking covers down, it is very much just a background noise, it does not sound like someone is trying to excavate your back garden and in fact we have found it allows you a smile knowing that your Drum is doing its thing whilst you can enjoy the serenity of your koi and garden.

DracoDrum Solum will automatically restart without any external intervention upon any power failure

Maintenance



NB always ensure the red Off Button is activated before doing anything within the drum to ensure it will not start a cleaning cycle

All drums at some point will either suffer from biofilm build-up or limescale deposits. This is easy to see on a Dracodrum Solum as the "time between washes" display will start to decrease.

Cleaning the Screen

Set the wash duration to 4, press the manual button and jetwash the screen with a standard nozzle, not a pulsating one. The nozzle should be about 3 to 4 inches from the screen to gain maximum benefit. Once done, set the wash duration back to how it was.

Waste Tray

Every fortnight or so (or more if there is a blanketweed/heavy leaf issue), power off the drum, unscrew the 6 bolts holding the waste tray on, disconnect the drain pipe and withdraw the waste tray. Make sure it is clean and then replace. All 6 bolts on the front of the drum holding the plate should be finger tight only. We actually use a socket without the ratchet to tighten them up in the factory.

General

Periodically it is wise to purge your filter. Although DracoDrum filters down to 58 micron, there are still particles smaller than this in the waste column. These can congregate within a filter and on our own heavily stocked system, a bi-monthly cleanout is usually carried out. You will get a feeling for how often you need to do this as every system is different.

Tips

All drum filtered systems should have a trickle in. This is crucial on a pressure pump wash system as the drum extracts water from the pond to wash itself. It is highly important in any event as you will now no longer be doing water changes by cleaning your filter. Failure to do so will likely result in a build up of nitrate (and increased algae and blanketweed issues) and a drop in Carbonate hardness (KH) and buffering capacity of the pond.

There may be a slight nitrite level increase after fitting any drum. This is down to a switchover in the type of nitrobacter inhabiting your system to a "clean loving" variety. This usually lasts no more than a couple of weeks and has not been seen to be detrimental to fish stocks.

Gravity fed systems, you can do a partial bottom drain purge by switching off your drum but not the circulation system. Allow the water level within the filter to drop as low as it can, then turn the drum back on. The backfilling water should increase flow down the bottom drain pipe and clean the pipe run. If using the optional pressure pump, allow the water level to drop to nearly the bottom of the inlet tube. You will not damage the wash pump by running it dry as it is self-priming.

If the pond is not entirely clear, it may be that the float switch is too low in the water for gravity fed systems or the drum is too high up for pump fed. If that is the case, the water pressure "differential"

between the inside and the outside of the drum screen is too great and waste can extrude itself through the screen and cause the water quality to become turbid. Readjust the float switch higher in the water (gravity) or drop the drum lower in the water (pump) to resolve this.

Diagnosics

The DracoDrum should be virtually problem free, but like any electro mechanical device, it may occasionally need help. The 4 LED's on the control panel can help to diagnose issues.

- **RED sensor led** goes solid (stops flashing) And drum stops washing after 4 minutes (drum failsafe mode – see paragraph 2 in “operation”)

Water sensor is too high (gravity) too low (pump fed). Reset height.

Waste Tray is full of dirt and is not expelling water - clean waste tray.

Screen is blocked but tray is empty (will be accompanied by low "time between washes" display), jetwash screen.

If screen is clean, maximum flow rate of the drum has been exceeded, so water level cannot return to running level. Reduce flow.

Tap fed systems – Water supply has been turned off/pressure reduced substantially. Check incoming water supply.

Failed / disconnected water valve – disconnect incoming water supply and visually check ball valve operation when pressing the “manual wash” button.

- Drum does not trigger, manual wash button has no effect

Green led is off - no power to controller.

Green led is on - umbilical is not correctly plugged into drum.

NB for pump fed, drum still refuses to trigger but above points are ok, remove waste tray and clean out float switch.

- BLUE LED's continuously on, drum always washing and also no red flashing LED
- Only one blue LED comes on

Faulty control board in both cases - Contact dealer

- BLUE LED's come on when triggered, drum rotates but no wash

Faulty or disconnected pressure pump or water valve. Check connections in the drum terminal box (there is a diagram within the box to make this easier).

- BLUE LED's come on when triggered, drum washes but does not rotate

Faulty or disconnected drive motor - again check the drum terminal box.

- In wash cycle, motor rotates but drum does not

Drum is jammed. Turn drum off, remove waste tray and clear obstruction. Restart drum. If drum still does not rotate but motor shaft does, contact dealer.

- Weird display digits / “elements” missing in display numbers

This is caused by the time between washes exceeding 99 minutes. To resolve, adjust float switch higher to bring wash time back below 99 minutes. This should also stop waste sitting in the drum for long periods of time.

- Water not coming through all jets in wash cycle

Undo blue holding cap on blocked jet by quarter turn and remove jet assembly. "blow backwards" into the jet with your mouth and this should clear the obstruction. Check the inside of the jet to see if the obstruction is now visible and remove. Replace jet.

In hard water areas, an old toothbrush applied to the jet should clean it. If this is unsuccessful, spare jets are available from your dealer.

Breakages

The DracoDrum is completely modular meaning that if you should have an accident, all parts are replaceable without having to buy a new drum.

We are able to supply your local dealer with all replacement parts, up to and including the chassis and drum itself, so that your drum can be fixed and up and running again in a short period of time.

DracoDrum Guarantee

This product comes with a 1 year warranty, including the screen and all seals, which is valid from date of purchase. Proof of purchase will be required. Any unauthorised repairs, modifications or alterations to this unit will invalidate the warranty. DracoDrum Ltd accepts no responsibility or liability due to accident, improper installation or misuse. Liability is limited to replacement of the defective parts. This guarantee is not transferable. It does not affect your statutory rights.

DracoDrum Ltd and its dealers shall not be held liable for any consequential loss caused by or arising from the use of any DracoDrum products including loss of fish, plants or any other livestock as a result of any failure or defect of this product. Any dispute arising from the provisions of the warranty will be dealt with under the laws of England and Wales.